


LM Long Type Linear Bearing

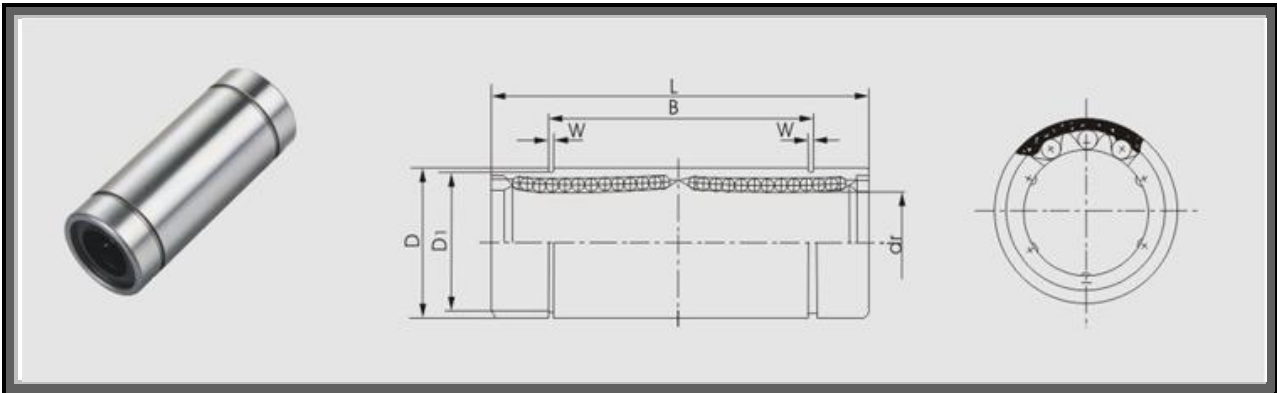

Model No.	Number Of Ball Rows	Main Dimensions										Eccentricity (Max.)	Basic Load Rating		Weight (g)
		Inscribed Circle Diameter		Outer Diameter		Length		Outer Locking Groove		W	Dynamic (kgf)		Static Co (kgf)		
		dr	Tolerance	D	Tolerance	L	Tolerance	B	Tolerance					D1	
LM6L	4	6		12	0	35		27		11.5	1.1	0.015	33	54	14
LM8L	4	8		15	-0.013	45		35		14.3	1.1		44	80	26
LM10L	4	10	0	19		55		44		18	1.3		60	112	55
LM12L	4	12	-0.010	21	0	57	0	46	0	20	1.3		83	160	58
LM13L	4	13		23	-0.016	61	-0.30	46	-0.30	22	1.3		83	160	77
LM16L	5	16		28		70		53		27	1.6		126	240	147
LM20L	5	20	0	32	0	80		61		30.5	1.6	0.020	143	280	171
LM25L	6	25	-0.012	40	-0.019	112		82		38	1.85		159	320	400
LM30L	6	30		45		123		89		43	1.85	254	560	472	
LM35L	6	35	0	52	0	135		99		49	2.1	0.025	270	640	708
LM40L	6	40	-0.015	60	-0.022	151 (154)	0	121	0	57	2.1		350	820	1090
LM50L	6	50		80		192	-0.40	148	-0.40	76.5	2.6		620	1622	2800
LM60L	6	60	0	90	0	209		170		86.5	3.15		770	2040	3800